

Dimmer compatibility LED

2873

6523U

6513U

2483HC

226200

1730DD

1731DD

7 525 60

48871

T39.07

431 HAN LED

SBD315RC

960000101

2490HP-exop

2494-K-exop

2485H

215-131

D350EX

310-0190X

D-PAF-200

68.40.99.07.99



BERKER

Calex

GIRA

JUNG

JUNG

KLEMKO

LEGRAND

LEGRAND

LUMEO

Schneider

TRADIM

TRADIM

TRADIM

TRONIX

YPHIX

NIKO

PEHA

SPL

INTERTEK

BUSCH-JAEGER

BUSCH-JAEGER

Good dimming. Some slight flickering in lower or higher levels may occur

Tronic

LED

LED

LED

LED

LED

LED

LED

Triac

LED

LED

LED

Tronic

Tronic

LED

LED

LED

Tronic

Dimming is not very smooth and/or flickering during a non definite part of the dimming range may occur

20-500

2-100

40-420

3-70W

20-500

5-150

3-60W

3-100

1-200

5-75

1-150

3-100

06-60

20-315

0-70

5-150

2x3-100

10-350

5-350

5-325

5-200/300

RL

RLC

RC

RC

RL

RC

RLC

RLC

RC

RLC

RL

RL

RC

RC

RC

RC


LED

RC

RLC

RL/RC

Dimming not possible

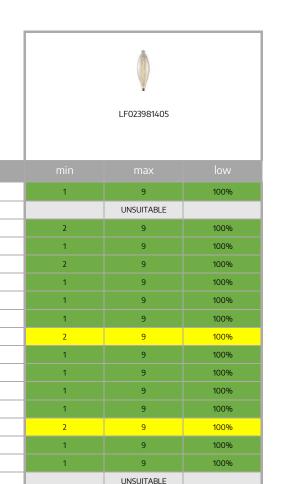

9

9

9

100%

100%

100%

100%

Information presented is meant to serve as a general guideline only. Tests were conducted on 1 single dimmer in our Laboratories. True 1:1 dimmer compatibility can only be determined onsite under actual conditions and within the final application. Results can differ from dimmer to dimmer of even the same type number and brand. Please contact your local representative or a recognized electrical installer if any additional information is required.

2

2

2

