




PROFESSIONAL
LIGHTING

L149125001

LED E14 DimToWarm Kaars C37x105mm
230V 250Lm 4W 2000-2700K 920-927
270° AC Opaal Dimbaar

Huishoudelijk, Dim To Warm

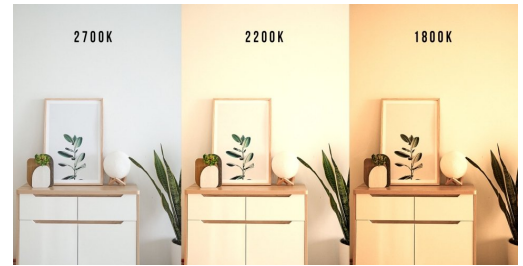

| General | |
|-----------------------|--------------|
| Eprel registration no | 831316 |
| Socket | E14 |
| Bulb shape | C37 |
| Width | 37.00 mm |
| Depth | 37.00 mm |
| Height | 105.00 mm |
| Finish | Opal |
| Colour | White |
| Colour housing | White |
| Body material | Polycarbonat |
| Lifespan | 25000 hours |
| Switches | 50000 |
| Beam angle | 270 ° |
| Dimmable | Yes |
| Degree of protection | IP20 |
| Net weight | 0.053 kg |
| Warranty | 2 years |

| Energy | |
|-------------------------|------------|
| Operating voltage | 230 V |
| Volt | 220..240 V |
| Frequency | 50..60 Hz |
| Watt | 4 W |
| Current type | AC |
| Power factor | 0.75 |
| Energy efficiency class | G |
| Energy consumption | 4 W |
| Replacement wattage | 25 W |
| Lamp efficacy | 62.50 |

| LED | |
|-------------------------|---------------------------|
| Filament LED | No |
| LED type | SMD 3628 |
| Dimm type | Trailing and leading edge |
| Number of leds / sticks | 8 |
| Colour consistency SDCM | SDCM6 |
| Dim to warm | Yes |
| Adjustable beam angle | No |

| Light | |
|-----------------------------|--------------|
| Kelvin | 2200..2700 K |
| Colour temp nr | 920..927 |
| Stable lumen | 250 lm |
| Color Rendering Index (CRI) | 97 |

| Ordering details | | |
|------------------|----------------|----------------|
| L149125001 | Quantity pc(s) | EAN |
| Single package | 1 | 8718739049451 |
| Inner carton | 10 | 18718739049458 |
| Outer carton | 100 | 28718739049455 |



Pottenbakkerstraat 35, 4871 EP Etten-Leur, The Netherlands | www.spl-lighting.com | info@spl-lighting.com | Telephone +31 (0)76 - 503 77 17
Fax +31 (0)76 501 78 69 | [f splprofessionalighting](#) | [schiefersignaal](#)

27-07-2024