




Dimmer compatibility LED

	Good dimming
	Good dimming. Some slight flickering in lower or higher levels may occur
	Dimming is not very smooth and/or flickering during a non definite part of the dimming range may occur
	Dimming not possible

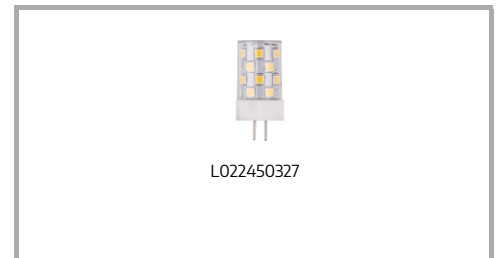

Recommended driver SPL 605100502

For other drivers please contact our sales department

Brand	Model	Type	load	load type	min	max	low
BERKER	2873		20-500	RL	1	9	90%
BUSCH-JAEGER	6523U		2-100	RLC	1	9	70%
BUSCH-JAEGER	6513U	Tronic	40-420	RC		UNSUITABLE	
Calex	2483HC	LED	3-70W	RC	1	9	80%
GIRA	226200		20-500	RL	2	9	90%
INTERTEK	68.40.99.07.99	LED	5-150	RC	1	9	100%
JUNG	1730DD	LED	3-60W	RLC	1	9	90%
JUNG	1731DD	LED	3-100	RLC	1	9	90%
KLEMKO	D-PAF-200	LED	1-200	RC	2	9	70%
LEGRAND	7 525 60	LED	5-75	RLC	2	9	80%
LEGRAND	48871	LED	1-150		2	9	90%
LUMEO	T39.07	Triac	3-100	RL	1	9	100%
PEHA	431 HAN LED	LED	06-60	RL	2	9	80%
Schneider	SBD315RC	Tronic	20-315	RC	2	9	80%
SPL	960175101	LED	2-175	RC/RL	1	9	100%
SPL	960175121	LED	0-125	RC/RL	1	9	100%
TRADIM	2485H	LED	0-70	RC	1	9	100%
TRADIM	2490HP-exop	Tronic	5-150	RC		UNSUITABLE	
TRADIM	2494-K-exop	Tronic	2x3-100	RC	2	9	90%
TRONIX	215-131	LED	10-350	LED	2	9	90%
YPHIX	D350EX	LED	5-350	RC	2	9	80%
NIKO	310-0190X	LED	5-325	RLC	2	9	80%